


## > WALL MOUNTED DISPLAY

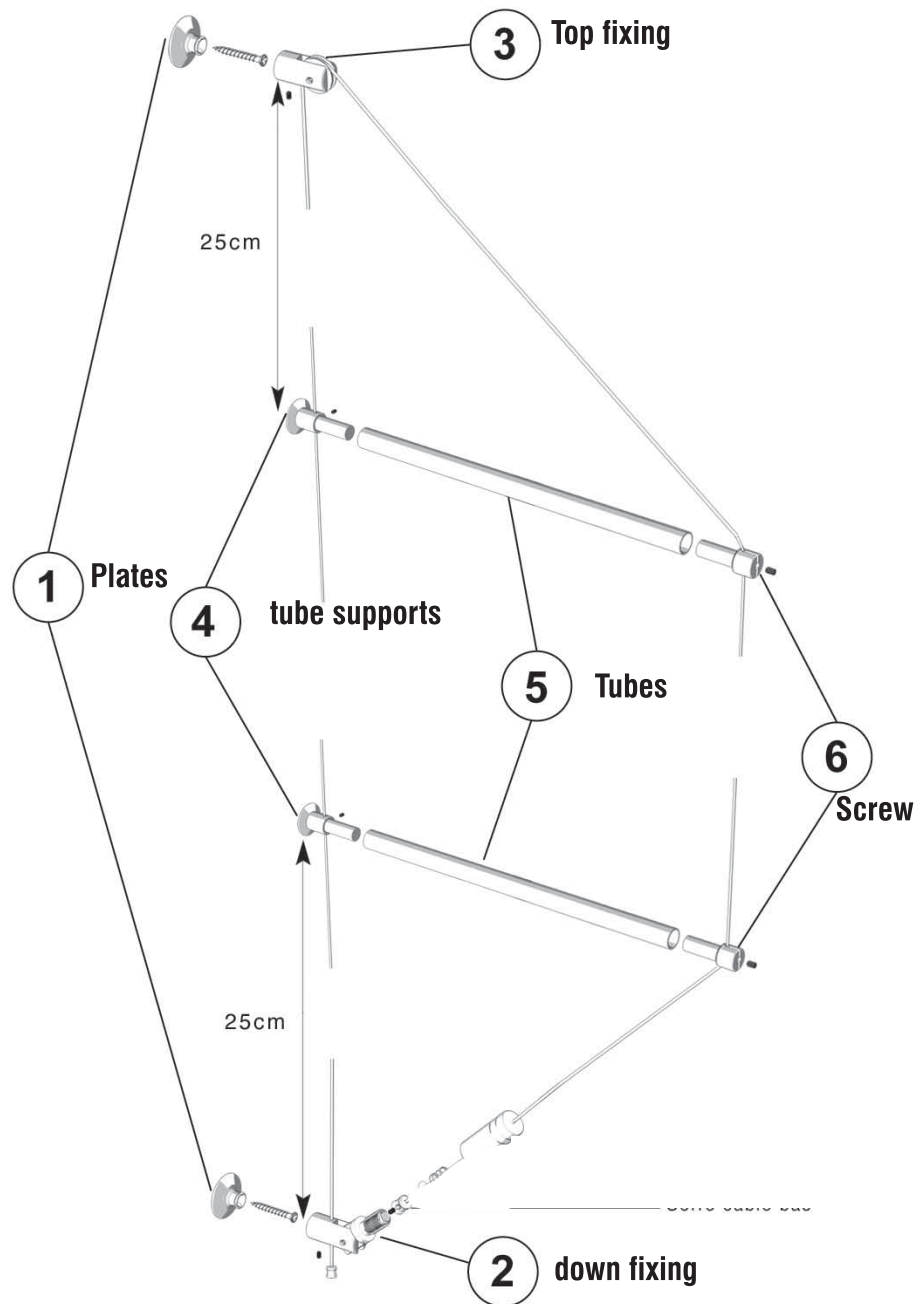

## ASSEMBLY INSTRUCTIONS

### WALL MOUNTED DISPLAY UNIT

- 1) Align the two base plates (1) and attach, using the screws provided with the kit.
- 2) Insert the lower anchor (2) and top fixing (3) into the base plates (1) and tighten the Allen screws.
- 3) Thread the cable through the lower anchor (2), the two rod supports (4) and the top fixing (3).
- 4) Pull the cable taut manually and secure the two rod supports (4) evenly at approximately 25 cm from both the lower anchor and the top fixing, using the Allen screws.
- 5) Load the rods (5) into their supports (4).
- 6) Load the front supports (6) into the rods. Pull the cable taut manually to adjust the two rods (5) horizontally. Tighten the two guide screws (6)
- 7) Thread the cable through the adjusting sleeve, the spring, the washer and the lower universal grip. Pull the cable close to the lower anchor, and cut it with a wire-cutter so that it reaches halfway up the lower anchor (2).
- 8) Leaving a 0.5 cm clearance between the bottom of the lower universal grip and the top of the lower anchor, tighten the Allen screw firmly on the lower universal grip.
- 9) Adjuste the tension of the cable without over-tightening.